


**ACE-H20-55-380C Emergency LED Driver**



**Emergency Power:** Battery Type/Model No.: LiFePO<sub>4</sub> 9.6 VDC with 4600 mAh

Output Power Max	Input Power	Input Current Max	Emergency Operating Time	Battery Charge Time Max.	Output Voltage	Output Current	Battery Voltage	IP Rating	Battery Charge Current	Battery Type
20 W	5 W	70 mA	90 min.	48 Hrs	15-55 V	380 mA	9.6 V	30	210 mA	LiFePO <sub>4</sub>

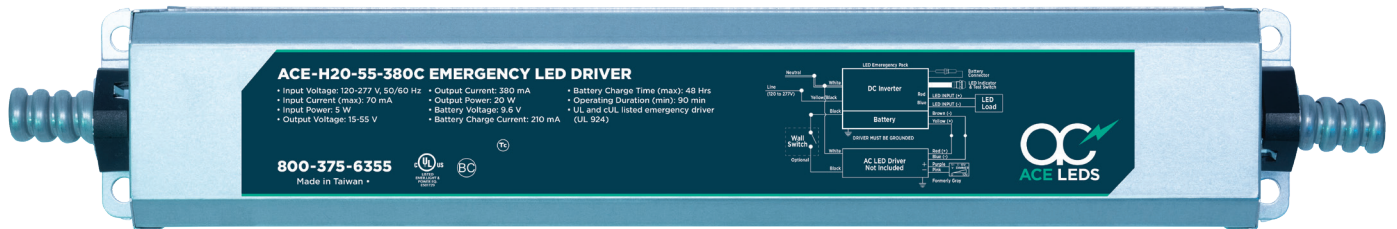

**Description:**

This AC Electronics UL Listed Emergency LED Driver allows a single fixture to be used for both regular and emergency (loss of power) operations. If power fails, this emergency driver switches to “Emergency Mode”. It will then operate the LED modules for 90 minutes at an output voltage in the range of 15-55 V. It can be used in

conjunction with switched and unswitched fixture applications. During Emergency operation, this driver will drive any LED module that is designed to accept a constant current input of 380mA and has an input voltage in the range of 15-55 VDC.

**Product Features:**

- At least 90 minute operation in emergency mode
- Wide range input voltage - range - 120-277VAC
- Test switch and AC Power-On LED indicator for manual test
- Operating Temperature Range 0°C Through 55°C
- Up to 76% Efficiency
- Surge Protection - 3Kv
- Open/Short/Over-Voltage/Over Temperature protection
- Weight: 3.85 lb.

**Safety:**

- UL and cUL Listed as an LED emergency driver (UL 924)
- UL/cUL Class 2
- UL Classified Field or Factory Installation
- Two-wire universal AC Input
- Self-sensing output voltage adjusts to various LED loads
- Includes battery status indicator
- Long life high temperature LiFePO<sub>4</sub> battery
- Maximum Case Temperature 66°C @ 3-year Warranty
- Warranty: 5 years based on a max. case temp. of ≤60°C\*
- AC Driver maximum output current = 5.0 Amps

**Product Benefits:**


- Title 24 compatible
- Maintains constant emergency light levels. No power/light degradation throughout the 90-minute runtime.
- Can be used with existing or new fixtures.
- LiFePO<sub>4</sub> batteries have a life span up to 10 times longer than that of traditional lead acid batteries. They also operate with much lower resistance and consequently recharge at a faster rate.
- With metal conduit for NEC compliance
- CEC Title 20 Compliant

**Applications:**

- New and existing fixtures
- Emergency back-up installations
- Emergency only fixtures
- With constant current Class 2 LED driver

**5-Year USA-Backed Warranty\***  
See complete AC Warranty information for details

For questions or to place an order contact us at [oemsales@aceleds.com](mailto:oemsales@aceleds.com) or 800-375-6355 or your local WPG Americas Sales representative at [inquiry@wpgamericas.com](mailto:inquiry@wpgamericas.com) or 888-WPG8881

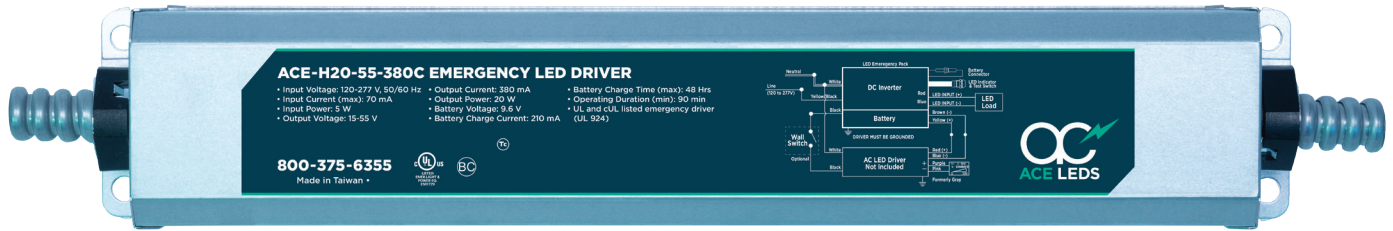

Dimensions / Weight			
Length	13.3"	Height	1.49"
Width	2.44"	Mounting Length	12.79"
Weight	3.85 lb		


Lead Lengths (Solid Hook-up Wires)					
Black	27.56"	Blue	29.52"	Brown	29.52"
White	27.56"	Red	29.52"	LED Indicator & Test Switch	23.62"/7.08"
Yellow/Black	27.56"	Yellow	29.52"	Battery Connector	33.07"

## INSTALLATION:

This emergency LED driver may be used with either a switched or unswitched fixture. If a switched fixture is used, an unswitched hot lead must be connected to this emergency LED driver to allow its battery to charge when AC power is available. The emergency LED driver must be fed from the same branch circuit as the AC powered driver (if used). This emergency LED driver should NOT be installed with fixtures where the ambient temperature may fall below 0 °C (32°F).

## Accessories with Ordering Numbers

The ACE-H20-55-380C model can be ordered with plastic or metal wall plates. Please see the ordering numbers below to determine which best meets your requirements.

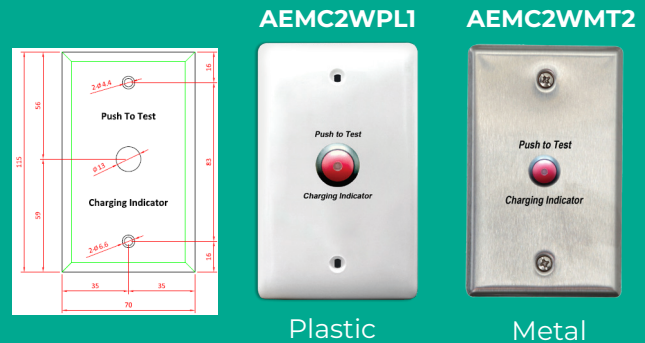


Wall Plate Dimensions			
Height	4.52"	Width	2.75"
Indicator to top	2.32"	Mounting Length	3.26"


- Maximum remote mounting distance to LEDs is 18 feet.
- The emergency backup driver case should be grounded.
- 18 AWG 600V/105°C tinned stranded copper lead-wires required for installation.

For questions or to place an order contact us at [oemsales@aceleds.com](mailto:oemsales@aceleds.com) or 800-375-6355 or your local WPG Americas Sales representative at [inquiry@wpgamericas.com](mailto:inquiry@wpgamericas.com) or 888-WPG8881

## RECOMMENDED (USE IF AN EXTERNAL SWITCHED LINE IS NOT AVAILABLE)

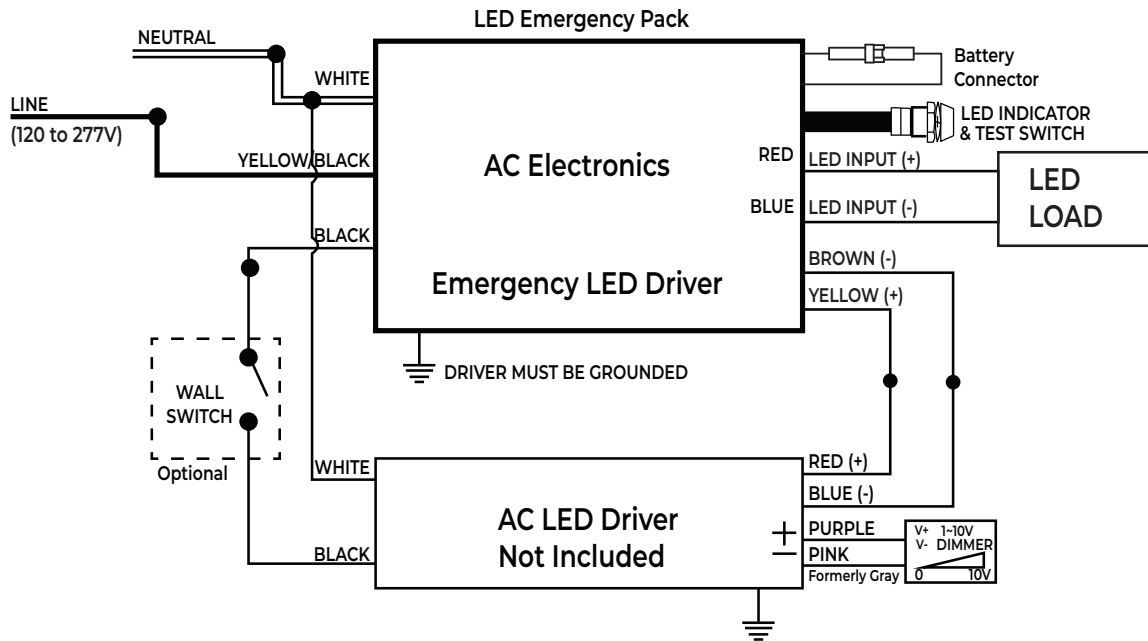

## ALTERNATE (USE IF AN EXTERNAL SWITCHED LINE IS AVAILABLE)

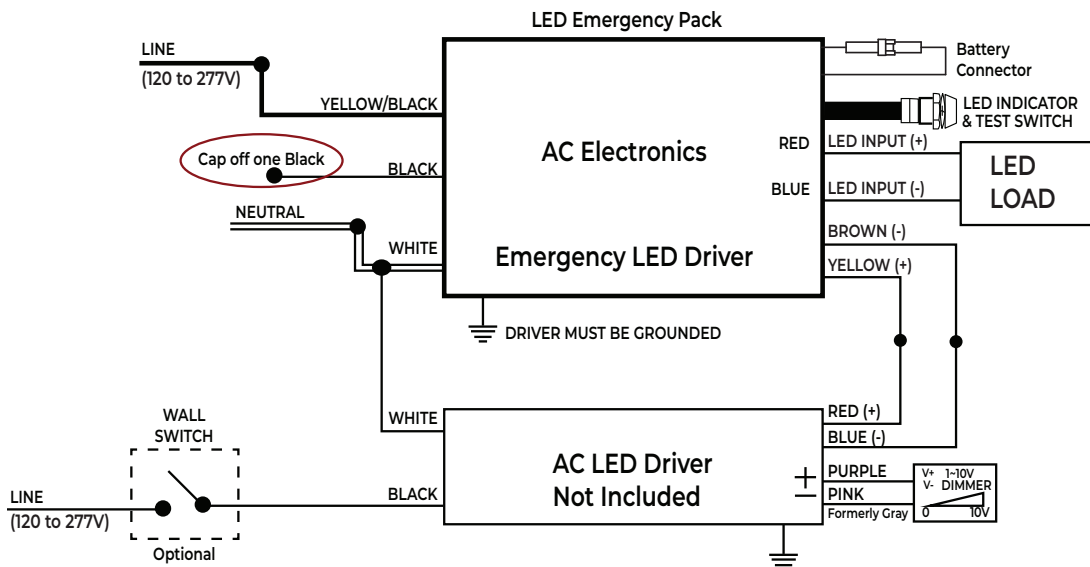

\*AC Electronics/AC LED Power Designs warrants to the purchaser that each Emergency LED Driver will be free from defects in material or workmanship for a period of 5 years when operated at max case temp of up to <math>-60^{\circ}\text{C}</math> when properly installed and under normal conditions of use. See [aceleds.com](http://aceleds.com) for complete warranty policy.

For questions or to place an order contact us at [oemsales@aceleds.com](mailto:oemsales@aceleds.com) or 800-375-6355 or your local WPG Americas Sales representative at [inquiry@wpgamericas.com](mailto:inquiry@wpgamericas.com) or 888-WPG8881