

MULTI-CURRENT SWITCHING AND DIMMING

Switch-Hitter™

Constant Current LED Driver


**Model Number
AC-50CDI.4BTMS**

Input Voltage: 347Vac
Input Frequency: 50/60Hz
Side Mount/Leads


ELECTRICAL SPECIFICATIONS:

Output Power Max.	Input Power	Input Current	Min. PF (full load)	Max THD (full load)	Output Voltage	Output Current	Tcase Max	Min Start Temp	Efficiency Max	IP Rating	Dimming Protocol	Dimming Range
50W	58W	0.18A	>0.9	<20%	25-36V	1400 mA±5%	90° C	-40° C	86%	64	0 to 10V	10 to 100%
38W	48W	0.14A	>0.9	<20%	25-36V	1050 mA±5%	90° C	-40° C	85%	64	0 to 10V	10 to 100%
25W	30W	0.09A	>0.9	<20%	25-36V	700 mA±5%	90° C	-40° C	84%	64	0 to 10V	10 to 100%

WIRING:

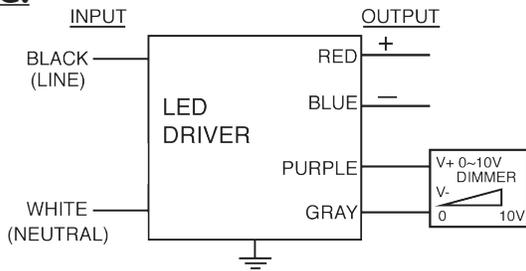

PHYSICAL:

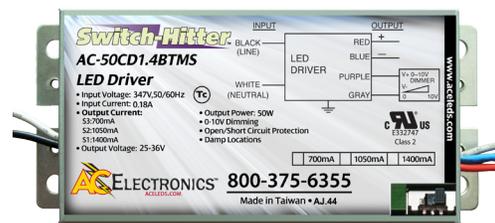

Lead Lengths

Black	5.9"	Blue	5.9"	Purple	5.9"
White	5.9"	Red	5.9"	Gray	5.9"

Dimensions

Length	Width	Height	Mounting Length
6.5"	2.9"	1.18"	5.9"

SAFETY & PERFORMANCE:

- UL and cUL Recognized, Class 2
- UL Outdoor Type I
- Class A sound rating
- No PCBs
- Overload Protection
- IP64
- Open/Short Circuit Protection
- LED driver has a life expectancy of 50,000 hours at Tcase of ≤75°C
- LED driver has a life expectancy of 100,000 hours at Tcase of ≤65°C
- Warranty: 5 yrs based on max case temp of <75°C; 3 yrs based on max case temp of 90°C*
- Input/Output Isolation
- FCC Title 47 CFR Part 15
- Surge Protection (3 Kv)

INSTALLATION:

- LED drivers shall be installed inside electrical enclosures
- 18 AWG 600V/105C tinned strand copper lead-wires are required for installation
- Max Remote installation distance is 18 ft
- LED driver cases should be grounded



*AC Electronics/AC LED Power Designs warrants to the purchaser that each LED Driver will be free from defects in material or workmanship for a period of 5 years when operated at max case temp of up to <75°C; 3 years from date of manufacture when operated at a max case temp of up to 90°C when properly installed and under normal conditions of use. See aceleds.com for complete warranty policy.

3401 Avenue D, Arlington, TX 76011 • 800-375-6355 • www.aceleds.com

Data is based upon tests performed by AC Electronics in a controlled environment and representative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.

