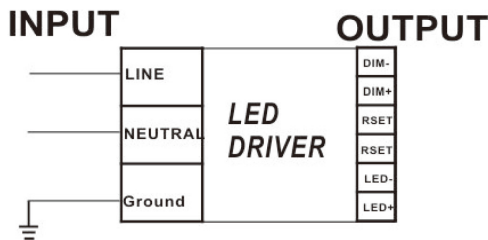


DIMMING, TYPE
TL RATED

ELECTRICAL SPECIFICATIONS:

Output Power	Input Power	Input Current	Min PF (full load)	Max THD (full load)	Output Voltage	Output Current	T case Max	Minimum Starting Temp	Efficiency Up To	Dimming Protocol	Dimming Range
80W	93W @ 347V	0.29A @ 347V	>0.9	<20%	28 to 36V	1500 to 2200mA±5%	90° C	-40° C	88%	0 to 10V	10 to 100%

WIRING:

PHYSICAL:

Dimensions

Length	15.55"
Width	1.49"
Height	1.06"
Mounting Length	15.23"
Hole Diameter	xx"
Weight	xx lbs.
Case Qty.	xx pcs.

RSET TABLE

RSET (Ω)	Iout (mA)	RSET (Ω)	Iout (mA)
>30K	2200	3.9K	1210
30K	2200		
15K	2000		
6.8K	1570		
5.1K	1380		

Tref Max Value (°C)	Tc/Tref Value (°C)	Ta/Value (°C)
85	74	40

SAFETY:

- UL and cUL Recognized
- Class 2
- UL Outdoor Type I
- Class A sound rating
- Overload Protection
- Open/Short Circuit Protection
- LED driver has a life expectancy of 50,000 hours at Tcase of ≤75°C
- LED driver has a life expectancy of 100,000 hours at Tcase of ≤65°C
- Warranty: 5 yrs based on max case temp of <75°C; 3 yrs based on max case temp of 90°C*
- Input/Output Isolation
- FCC Title 47 CFR Part 15
- Surge Protection (2 KV)

INSTALLATION:

- IP 66 Harsh Weatherproof
- Max Remote installation distance is 18 ft
- LED driver cases should be grounded
- LED drivers shall be installed inside electrical enclosures
- 18 AWG 600V/105C tinned stranded copper lead-wires are required for installation



*AC Electronics/AC LED Power Designs warrants to the purchaser that each LED Driver will be free from defects in material or workmanship for a period of 5 years when operated at max case temp of up to <75°C; 3 years from date of manufacture when operated at a max case temp of up to 90°C when properly installed and under normal conditions of use. See aceleds.com for complete warranty policy.

3401 Avenue D, Arlington, TX 76011 • 800-375-6355 • www.aceleds.com

Data is based upon tests performed by AC Electronics in a controlled environment and representative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.

