

Constant Current LED Driver

Model Number:
AC-50CD1.4PTNZ
AC50CD1.4PBNTZ
12 Volt Auxiliary Added

Input Voltage: 120-277V
 Input Frequency: 50/60Hz
 Side and Bottom Mounts/Lead Options
 < 1 Sec. Start time/(Starting with batch code AKT.48)
 Dim-to 1% (Default)




**Programmable, Digital,
 Wide-Range Adjustable Current & Dimming**

Electrical Specifications:

Output Power	Input Power	Input Current	Min PF (full load)	Max THD (full load)	Output Voltage	Output Current	T case Max	Min, Starting Temp**	Efficiency Up To	IP Rating	Dimming Protocol	Dimming Range
50 W	60 W	0.5 A @ 120 V, 0.22 A @ 277 V	>0.90	<20	15-55 V	400 mA - 1400 mA	90°C	-40°C	83%	64	0-10 V	1-100%


** This driver can operate down to -40°C in a non-dimming condition. Below 0°C some flicker may be observed.

WIRING:

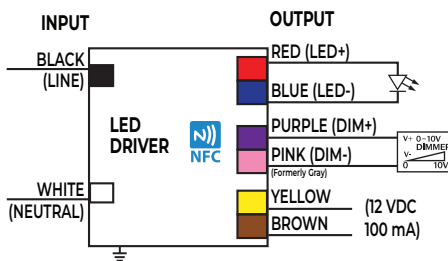

Lead Lengths			
Black	6"	Blue	6"
White	6"	Red	6"
Purple	7.1"	Pink	7.1"
Yellow	6"	Brown	6"

PHYSICAL:

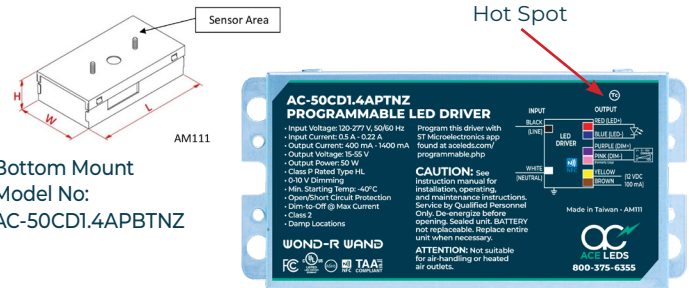

Dimensions	Length	Width	Height	Mounting
AC-50CD1.4PTNZ	5.23"	2.48"	1.18"	4.84"
AC-50CD1.4PBNTZ	4.56"	2.48"	1.18"	

Tref Max Value (°C)	Tc/Tref Value (°C)	Ta/Value (°C)
90	61.7	40

SAFETY:

- Class P Rated Type HL
- Class A sound rating
- Overload Protection
- Open/Short Circuit Protection
- LED driver has a life expectancy of 50,000 hours at Tcase of ≤75°C
- LED driver has a life expectancy of 100,000 hours at Tcase of ≤65°C
- Warranty: 5 yrs based on max case temp of <75°C; 3 yrs based on max case temp of 90°C*
- Input/Output Isolation
- FCC Title 47 CFR Part 15
- Surge Protection (2 KV)
- For connections use wire rated for at least 90°C
- Ta: 50°C
- Type: HL Class 2
- Gray (-) dimming wire has been changed to pink per the 2020 NEC section 410.69 and NEMA.**
- Dim-To-Off Programming Option**
 - Active: Code = 78 05 01 01
 - Inactive: Code = 78 05 00 01

INSTALLATION:

- Max Remote installation distance is 18 ft
- LED driver cases should be grounded
- LED drivers shall be installed inside electrical enclosures
- 18 AWG 600V/105C tinned stranded copper lead-wires are required for installation




ACE LEDS warrants to the purchaser that each LED Driver will be free from defects in material or workmanship for a period of 5 years when operated at max case temp of up to <75°C; 3 years from date of manufacture when operated at a max case temp of up to 90°C when properly installed and under normal conditions of use. See aceleds.com for complete warranty policy.

For questions or to place an order contact us at oemsales@aceleds.com or 800-375-6355 or your local WPG Americas Sales representative at inquiry@wpgamericas.com or 888-WPG8881

IOUT/VOUT CURVE

Use with [NFC-V Reader App](#) Available Free at Google App Store

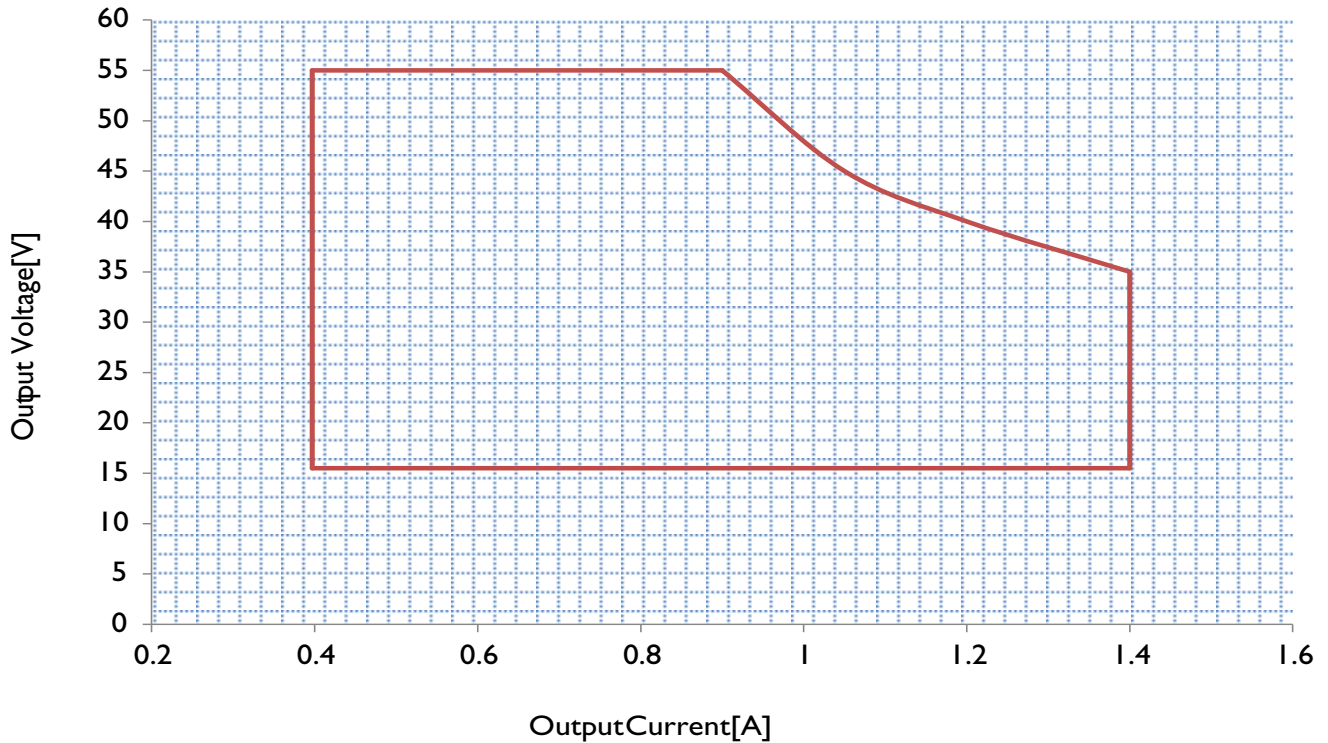


CONTROL THE IOUT WITH THE PROGRAMMING WAND. DOWNLOAD SOFTWARE FROM <http://www.aceleds.com/programmable.php>

For questions or to place an order contact us at oemsales@aceleds.com or 800-375-6355 or your local WPG Americas Sales representative at inquiry@wpgamericas.com or 888-WPG8881


PERFORMANCE CHARACTERISTICS

Life Time v.s. Case Temperature Curve

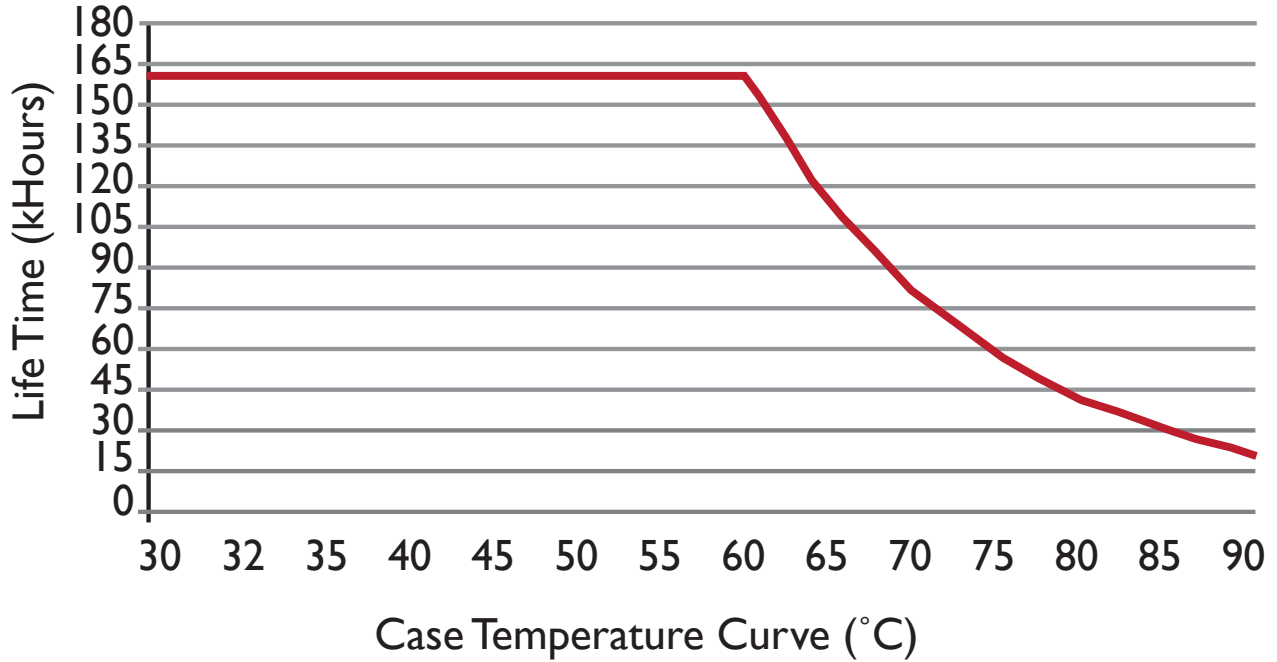

Derating Curve


120Vac & 277Vac

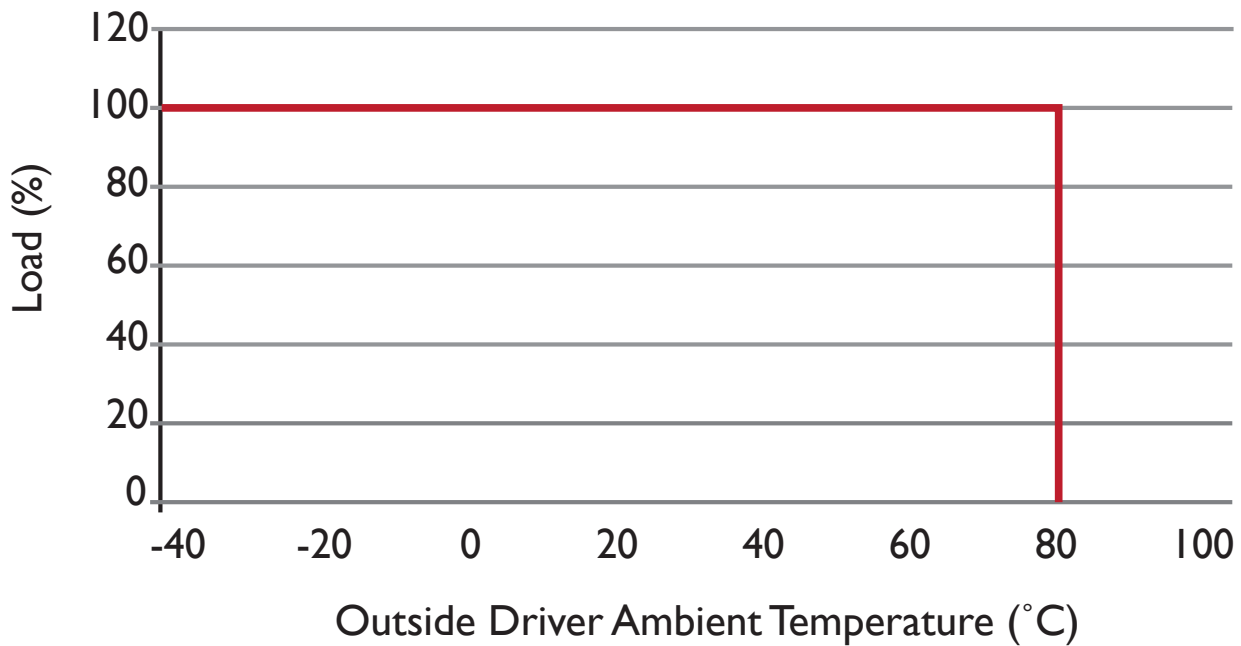


For questions or to place an order contact us at oemsales@aceleds.com or 800-375-6355 or your local WPG Americas Sales representative at inquiry@wpgamericas.com or 888-WPG8881

PERFORMANCE CHARACTERISTICS

Efficiency v.s. Load

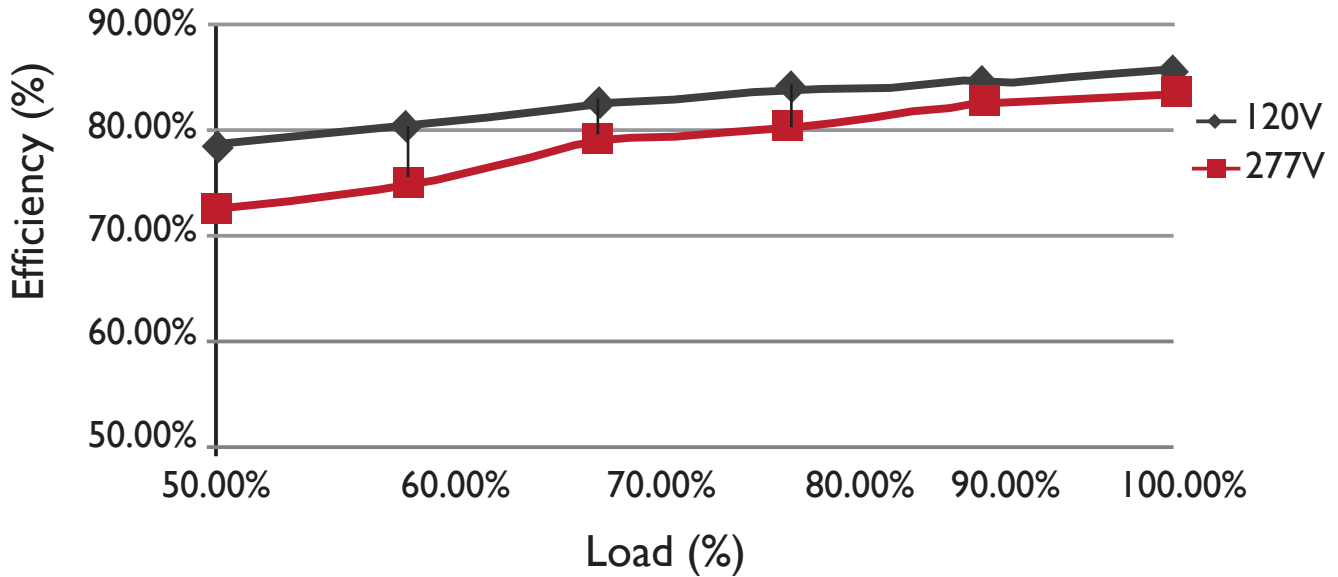


Power Factor v.s. Load

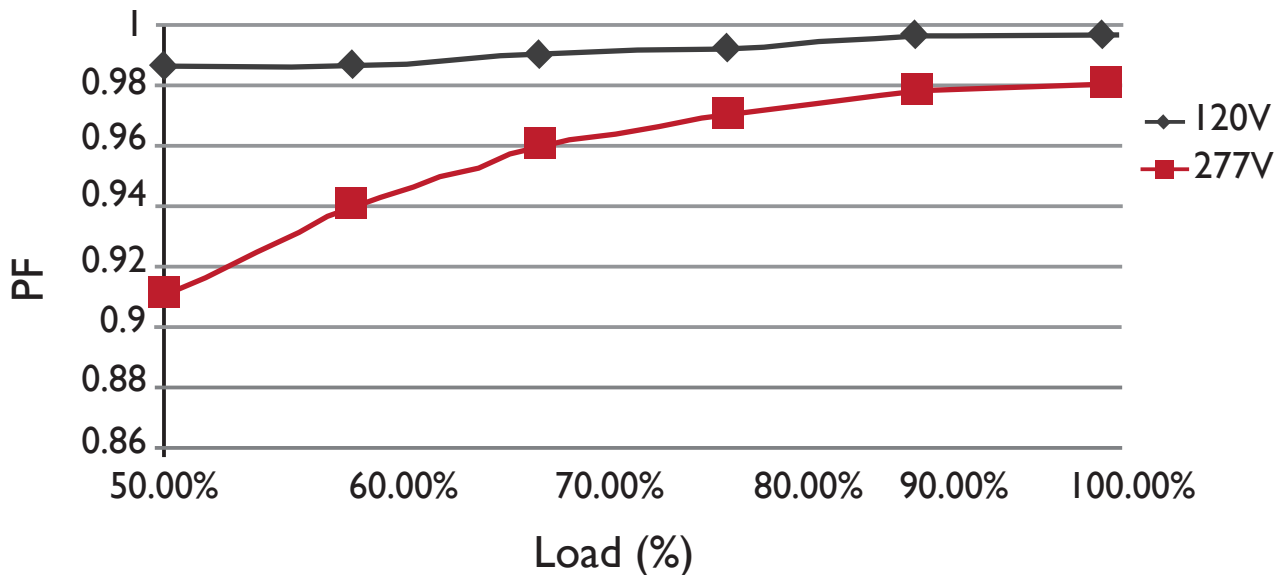


For questions or to place an order contact us at oemsales@aceleds.com or 800-375-6355 or your local WPG Americas Sales representative at inquiry@wpgamericas.com or 888-WPG8881

PERFORMANCE CHARACTERISTICS

Output Current v.s. Dimming

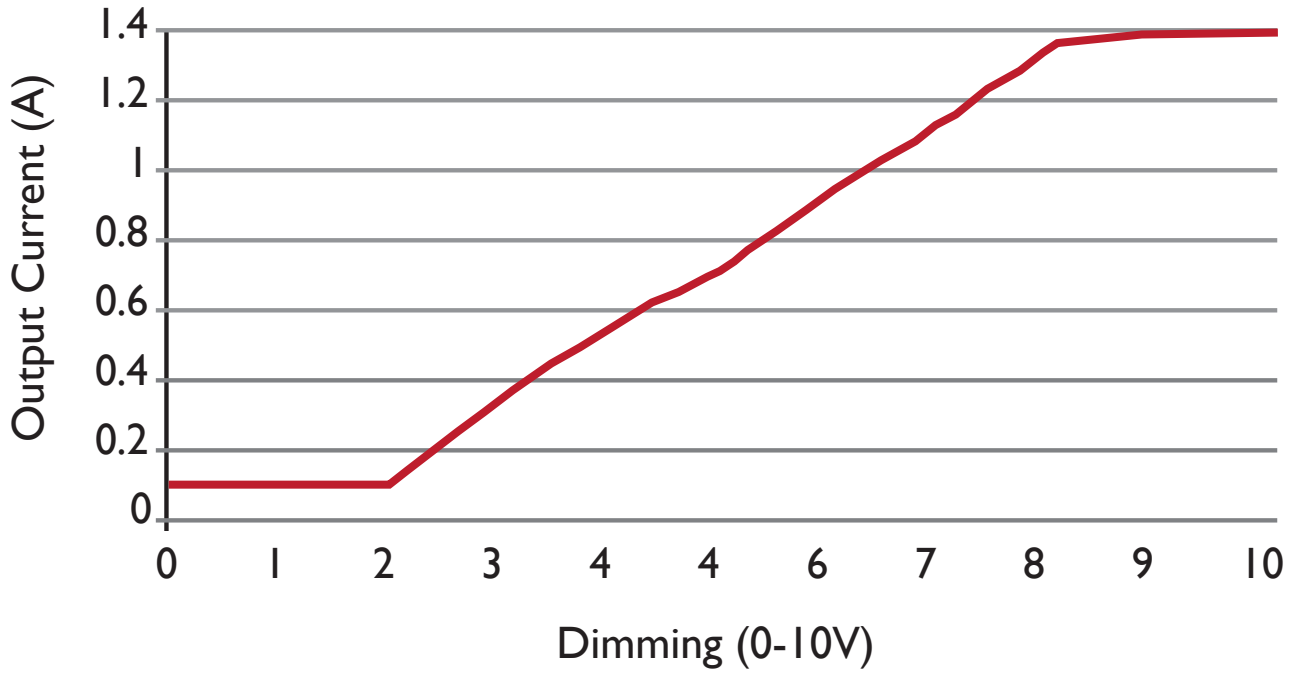

Output Current v.s. Resistance

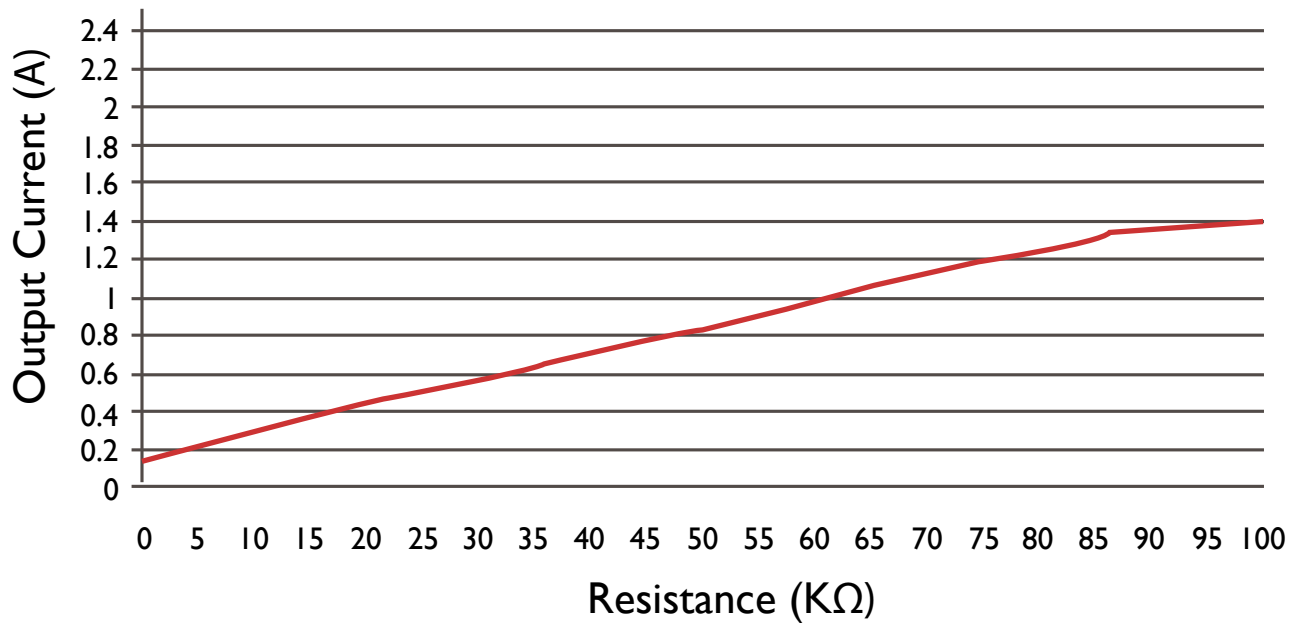

For questions or to place an order contact us at oemsales@aceleds.com or 800-375-6355 or your local WPG Americas Sales representative at inquiry@wpgamericas.com or 888-WPG8881