



The Smallest Possible Factors™



# Constant Current LED Driver Model Number AC25CD700AT2Q

**Input Voltage:** 120-277 VAC ( $\pm 10\%$ )

**Input Frequency:** 50/60 Hz

**Dimming:** 5 to 100%

**Surge Protection:** 2 Kv

Side Mount/Leads

Multi-Switching Current

## PHYSICAL DIMENSIONS:

**Length:** 2.88"  
**Width:** 1.43"  
**Height:** 1.07"  
**Mounting:** 2.68"  
**Weight:** 0.15 lbs.


ACTUAL SIZE



## ELECTRICAL SPECIFICATIONS:

Output Power Max	Input Power	Input Current	Min. PF (full load)	Max. THD (full load)	Output Voltage	Output Current	T case Max.	Min. Starting Temps.	IP Rating	Dimming Protocol	Dimming Range	Efficiency Up To
25.2 W	28.6 W	0.27 A @ 120 V 0.11 A @ 277 V	>0.9	<20	24-36 V	700 mA $\pm 5\%$	75° C	0° C	20	0 to 10 V	5 to 100%	88%
18 W	20.5 W	0.19 A @ 120 V 0.08 A @ 277 V	>0.9	<20	24-36 V	500 mA $\pm 5\%$	75° C	0° C	20	0 to 10 V	5 to 100%	88%
12.6 W	14.7 W	0.14 A @ 120 V 0.06 A @ 277 V	>0.9	<20	24-36 V	350 mA $\pm 5\%$	75° C	0° C	20	0 to 10 V	5 to 100%	86%

## WIRING:

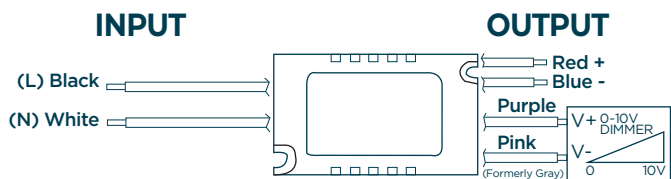

**Note:** Gray (-) dimming wire has been changed to pink per the 2020 NEC section 410.69 and NEMA.

## LEAD LENGTH:

Black	12"	Blue	6"	Purple	6"
White	12"	Red	6"	Pink	6"

## APPROVED DIMMERS:

Lutron	NTSTV-DV	Leviton	IP710 DL
Lutron	NFTV	Watt Stopper	ADF 120277

To order or consult with one of our engineers, contact us at:  
**800-375-6355 / aceleds.com**



## SAFETY & PERFORMANCE:




- Class P Listed
- Class A sound rating
- No PCBs
- Open/Short Circuit Protection
- LED driver has a life expectancy of 50,000 hours at Tcase of  $\leq 75^{\circ}\text{C}$
- Warranty: 5 yrs based on max case temp of  $75^{\circ}\text{C}^*$
- Input/Output Isolation
- Surge Protection (2 KV)
- Suitable for Dry Location
- Dimming Curve on the next page
- Gray (-) dimming wire has been changed to pink per the 2020 NEC section 410.69 and NEMA.

## INSTALLATION:

- LED drivers shall be installed inside electrical enclosures
- Max Remote installation distance is 33 ft
- 22 AWG 600V/105C tinned stranded copper lead-wires are required to use in installation

\*ACE LEDS warrants to the purchaser that each LED Driver will be free from defects in material or workmanship for a period of 5 years from date of manufacture when operated at max case temp of up to  $\leq 75^{\circ}\text{C}$  when properly installed and under normal conditions of use. See [aceleds.com](http://aceleds.com) for complete warranty policy.

## PERFORMANCE METRICS: AC25CD700AT2Q

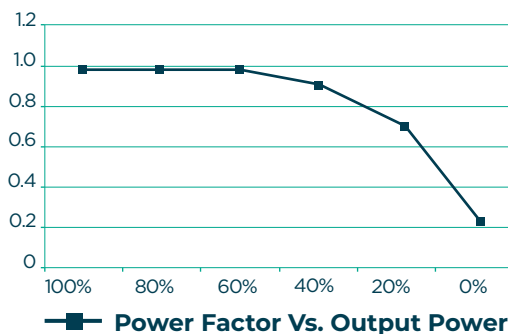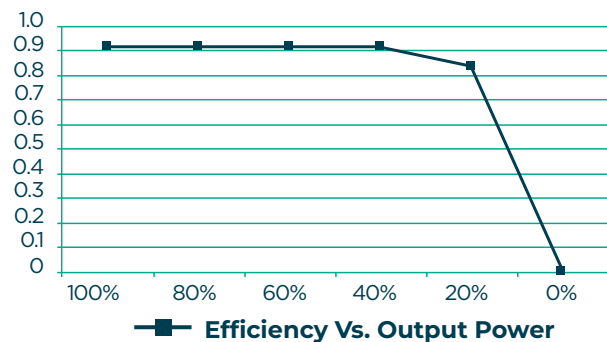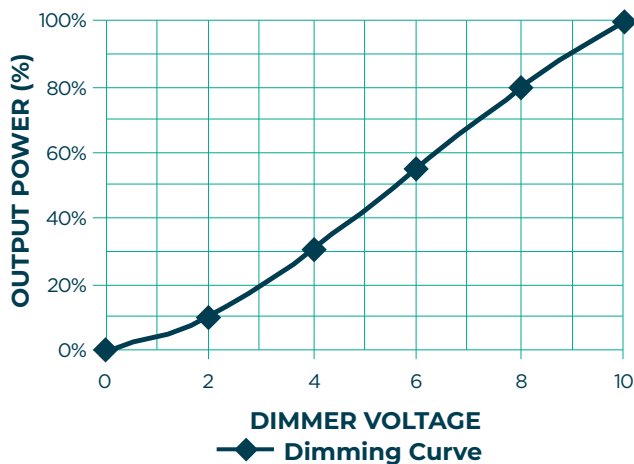

3401 Avenue D, Arlington, TX 76011  
800-375-6355 • [aceleds.com](http://aceleds.com)

Data is based upon tests performed by ACE LEDS in a controlled environment and representative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.

